



G&P New Energy Solutions

Mono-crystalline

GPM140-160W(36)

Photovoltaic modules
36pcs mono-crystalline silicon cell

GPM-140W	GPM-145W	GPM-150W
GPM-155W	GPM-160W	



Strengths

- Tolerance: 0+3%
- Plug&Play Connectors
- High transmission, low Iron Tempered Glass
- Bypass Diodes Protection
- Salt Mist And Ammonia Resistance Test
- 5400 Pa snow load
2400 Pa wind load




Warranty

- Manufacturing 10 years
- Power Production 90%:12 years 80%:25 years

Insurance

Insured
By CHUBB

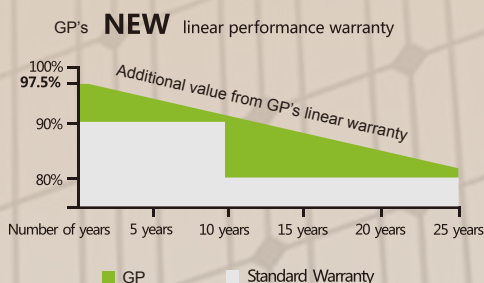

Add : Meilong Block, Chengxi New Zone Yongkang City ,
Zhejiang Province 321200 P.R. China

Tel : +86 579-87367775

Fax : +86 579-87367713

Web : www.eurosolargp.com

Email : info@eurosolargp.com



GPM140-160W(36)



G&P New Energy Solutions

Photovoltaic Modules

Module	GPM140-160W(36)					
Encapsulation	Glass/EVA/Cell/EVA/Backsheet					
Maximum Power Pmax	W	140	145	150	155	160
Maximum Power Voltage (Vmp)	V	18.20	18.40	18.60	18.60	18.80
Maximum Power Current (Imp)	A	7.69	7.88	8.06	8.33	8.51
Open Circuit Voltage (Voc)	V	21.84	22.08	22.32	22.32	22.56
Short Circuit Current (Isc)	A	9.23	9.46	9.68	10.00	10.21
Cell Efficiency	%	16.30	16.70	17.40	17.60	18.20
Module Efficiency	%	15.79	15.80	15.85	15.89	15.95
Tolerance	0+3%					
Max System Open Circuit Voltage	600V					
Junction Box (protection degree)	≥IP67					
Dimension	1480*680*35mm					
Weight	10.5kg					
Operate Temperature Scope	-40/+85°C					
Relative Humidity	0~100%					
Frame Thinkness	35mm					
Frame Colour	Gold/Brown/Black/Silver					

Standard Test Conditions[STC]: irradiance 1,000 W/m²; AM 1.5; module temperature 25°C. Measuring uncertainty of power is within ±3%. Tolerance of Pmp: 0~+3%. Certified in accordance with IEC61215,IEC61730-1/2.

Temperature Coefficients

NOCT		45°C±2°C
Short Circuit Current Temperature Coefficients	$\alpha(I_{sc})$	+0.059%/°C
Open Circuit Voltage Temperature Coefficients	$\beta(V_{oc})$	-0.330%/°C
Peak Power Temperature Coefficients	$\gamma(P_{max})$	-0.410%/°C

Nominal Operating Cell Temperature(NOCT) : 45°C±2°C


Output		
Cable 4.0mm ² (TUV)	Length 900mm	Connector MC4 type

Advantage

G&P series modules consist of **mono-crystalline** high efficient silicon cells, which are individually characterized and electronically matched before interconnection and laminated with toughened glass, EVA&Backsheet of high quality.

After assembled with anodized aluminum alloy frame, cable and junction box with MC4 connectors, G&P solar modules can be installed easily and work for a long period. At the same time, they can withstand the storm, strong wind and hail impact, etc.

I-V Curves

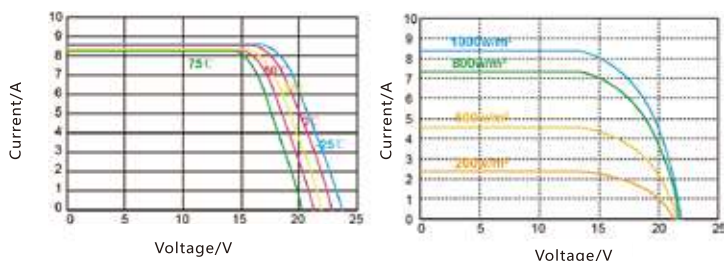

Dimensions

