




GRETECH

**Gretech 6 kW LPG/NG/Gasoline
Generator, portable
Model: JL7000G/E/T**

TECHNICAL PARAMETERS

Frequency	50Hz	60Hz
Rated power(LPG/GASOLINE)	6000W	6500W
Rated power(NG)	5200W	5500W
Max.power(LPG/GASOLINE)	6500W	7000W
Max.power(NG)	5500W	6000W
Rated voltage	110V-240V/380V-400V	
DC output	12V/8.3A	
Phase	Single-Three	
Starting system	Recoil/Electric starting	
Fuel tank capacity	25L	
Fuel consumption	GASOLINE:0.9L/kw.h, CNG:0.35m3/kw.h, LPG:0.36kw/kw.h	
Recommended input pressure of NG/LPG	2.0 ~ 6.0kPa(0.29 ~ 0.87PSI)	
Engine type	JL440G	
Noise level dB(7m)	70dB(A)	
Dry weight R/E	86/91kg	
Dimension RE/T	700×530/560×560mm	

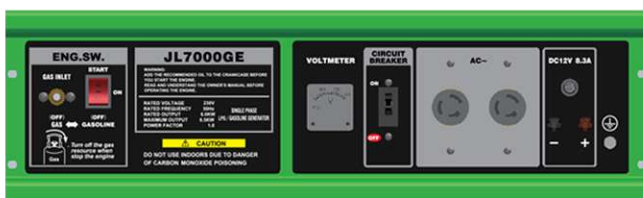

**GRETECH® LPG/NG/GASOLINE
GENERATOR**